



ROLLER TILT® 562/625 - Travel Characteristics (24A13) Mounting Bracket

SINGLE CASE

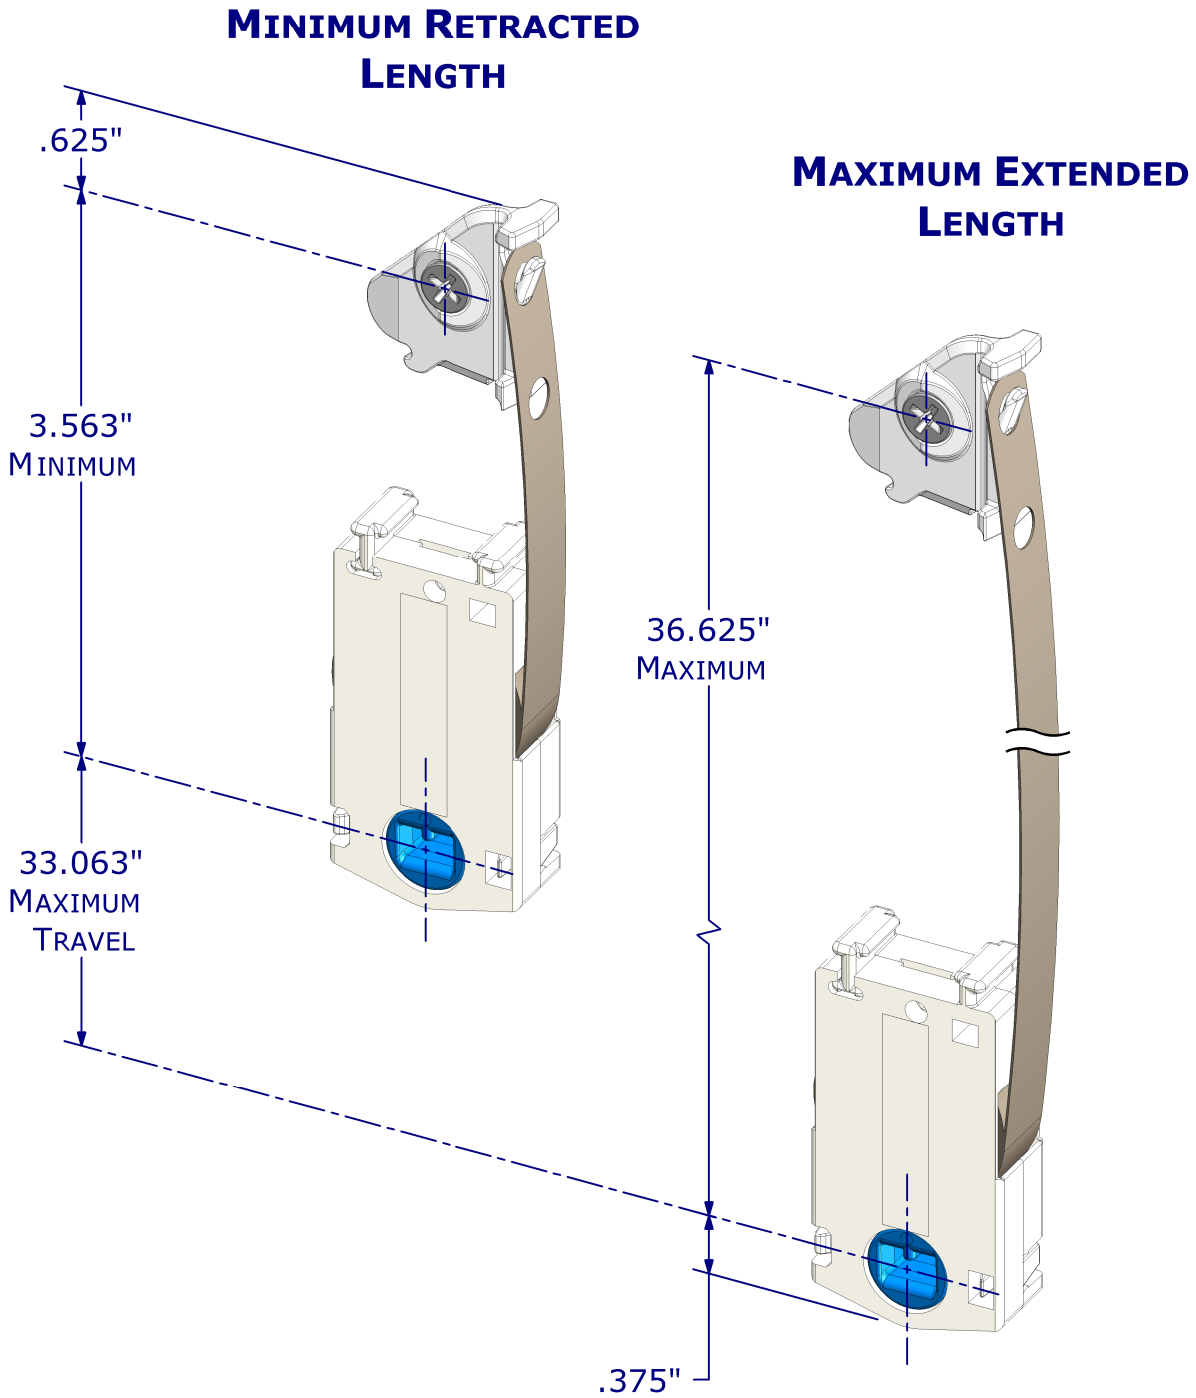


ROLLER TILT[®] 562/625 - Travel Characteristics (24A13) Mounting Bracket

DOUBLE (2) CASE

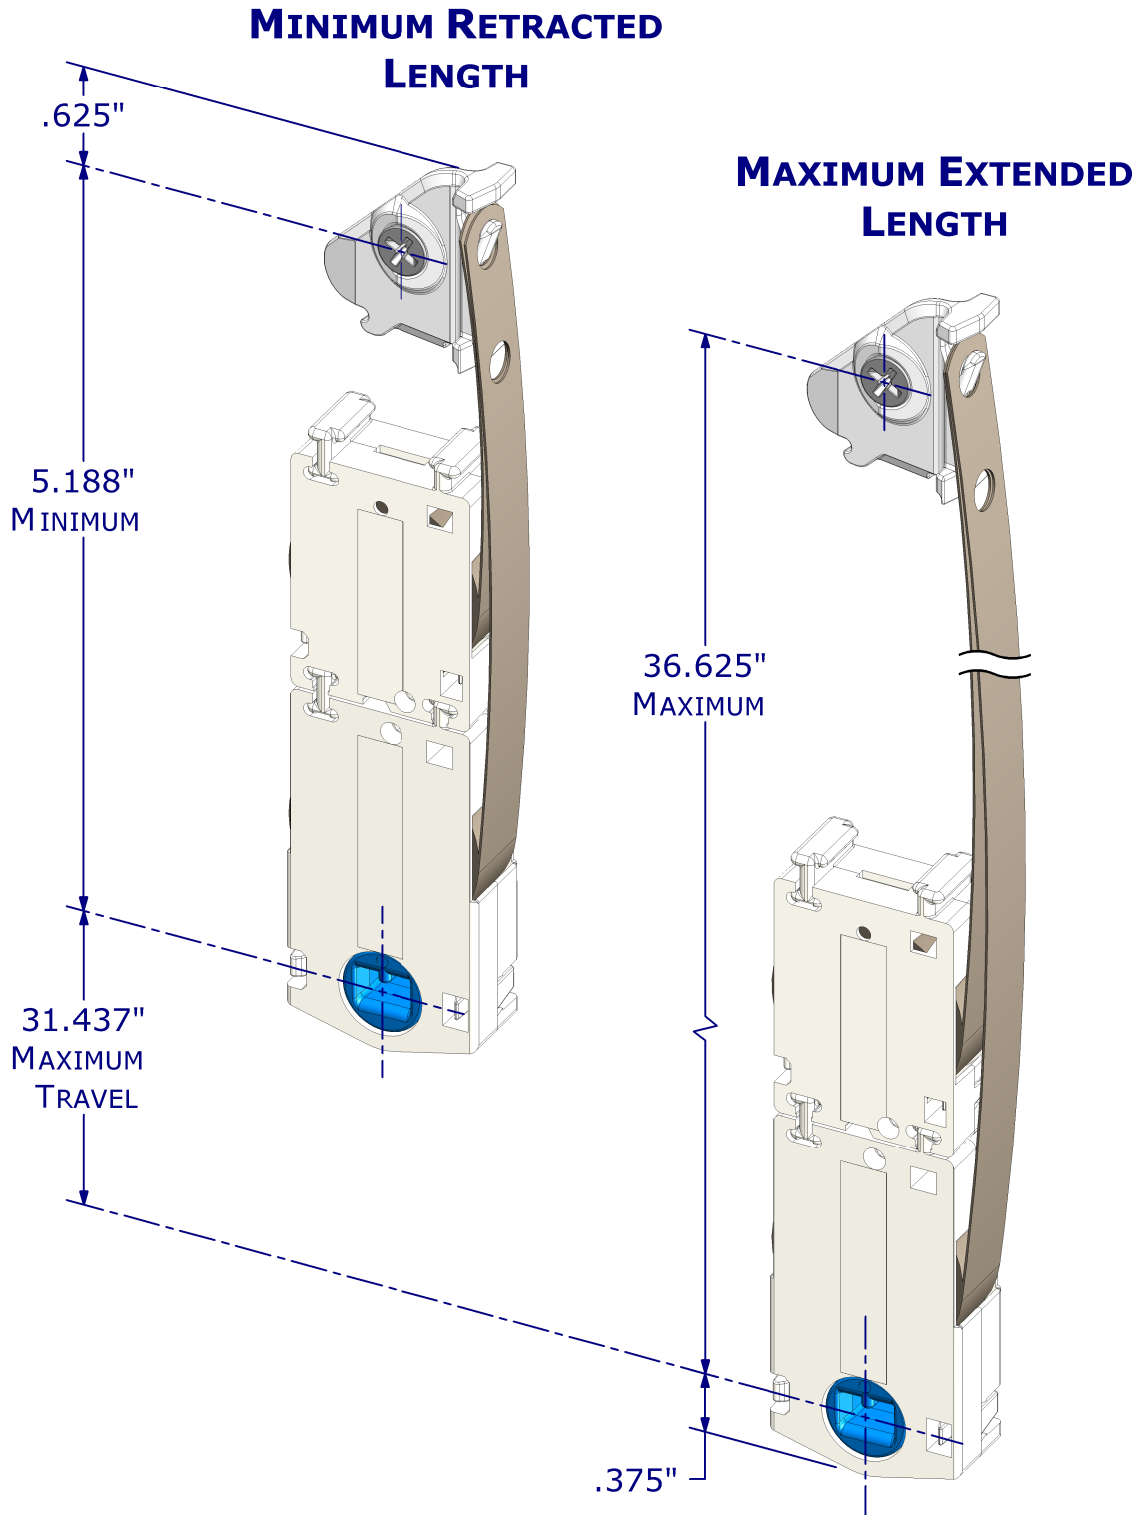

ROLLER TILT® 562/625 - Travel Characteristics (24A13) Mounting Bracket

TRIPLE (3) CASE

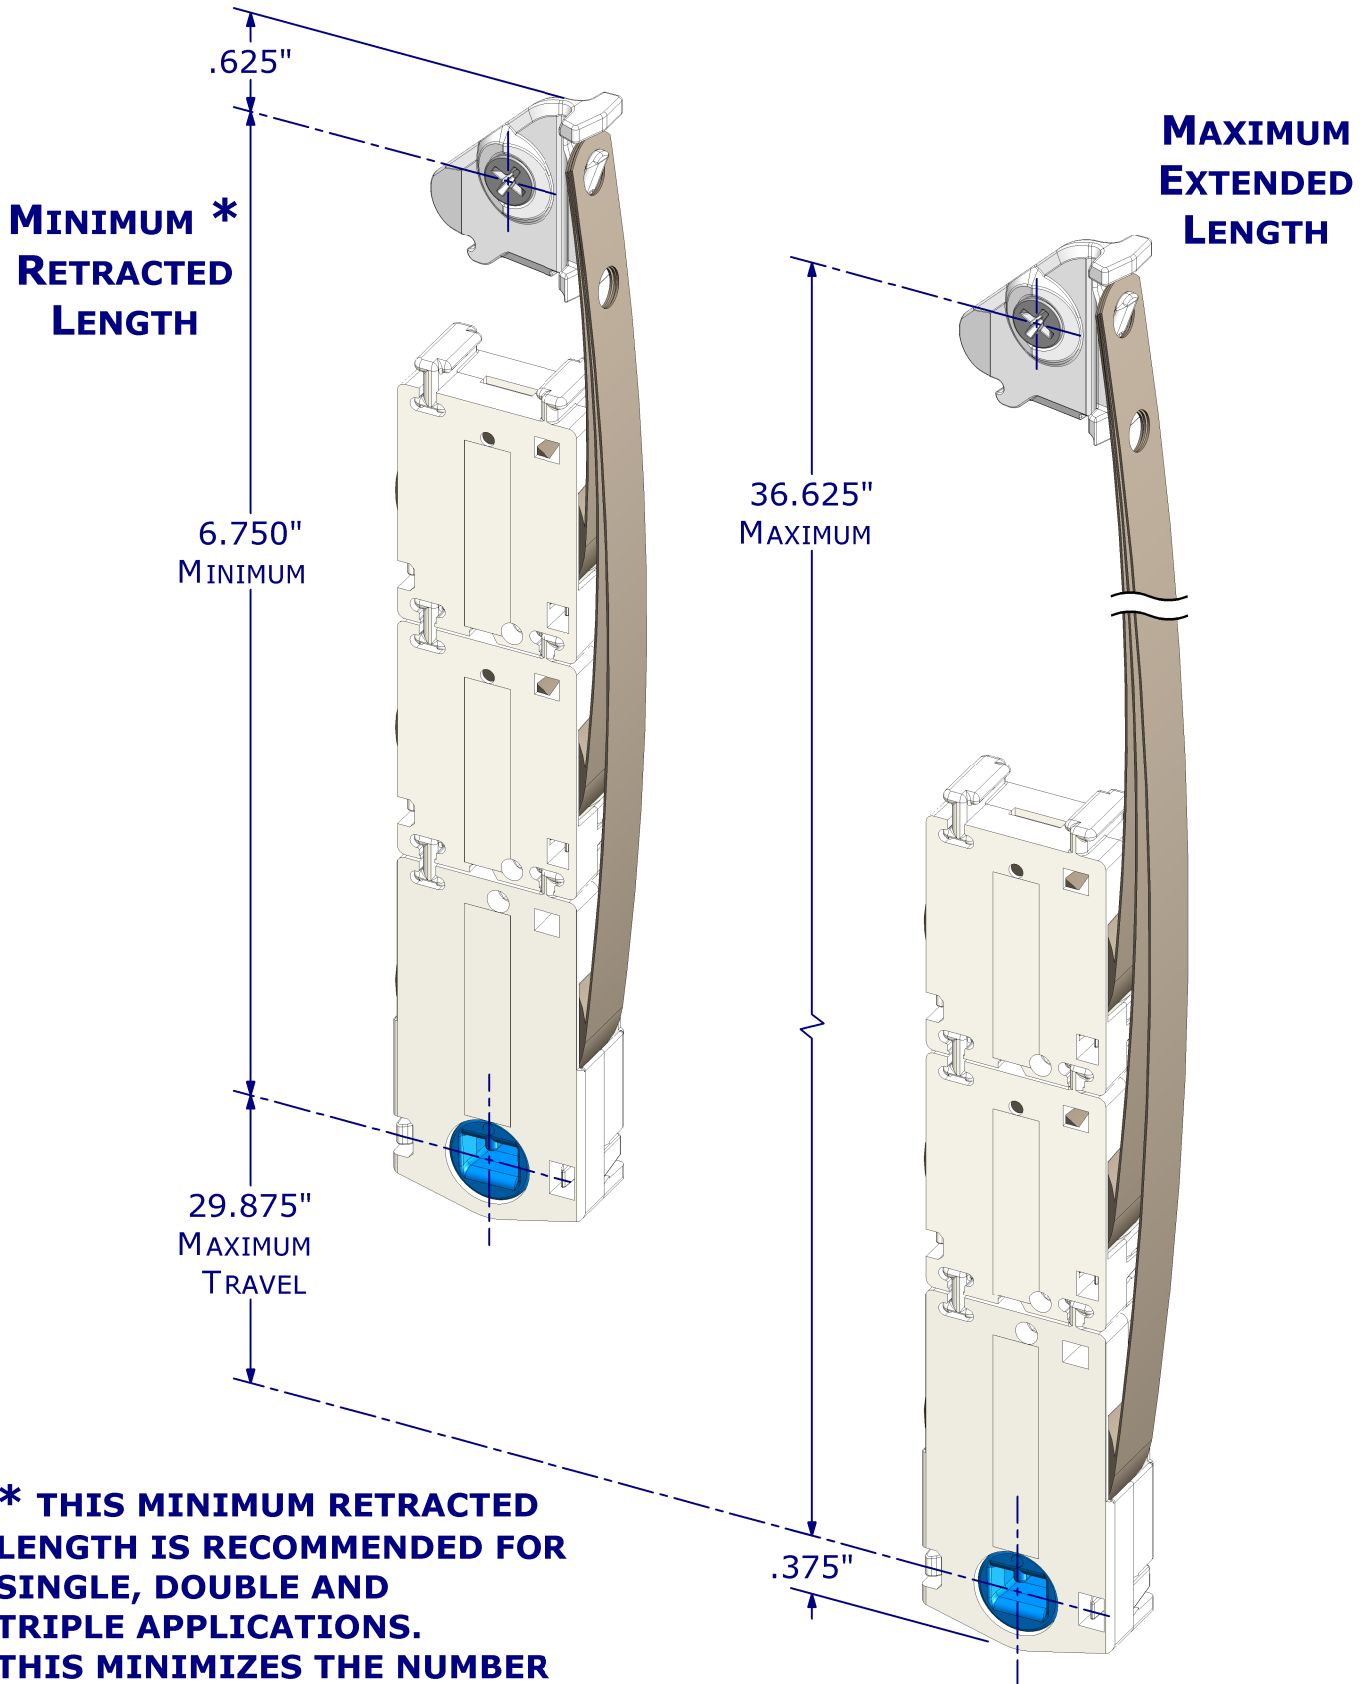

*** THIS MINIMUM RETRACTED LENGTH IS RECOMMENDED FOR SINGLE, DOUBLE AND TRIPLE APPLICATIONS. THIS MINIMIZES THE NUMBER OF MOUNTING LOCATIONS.**