


REVISIONS			
REV.#	DESCRIPTION	DATE	BY

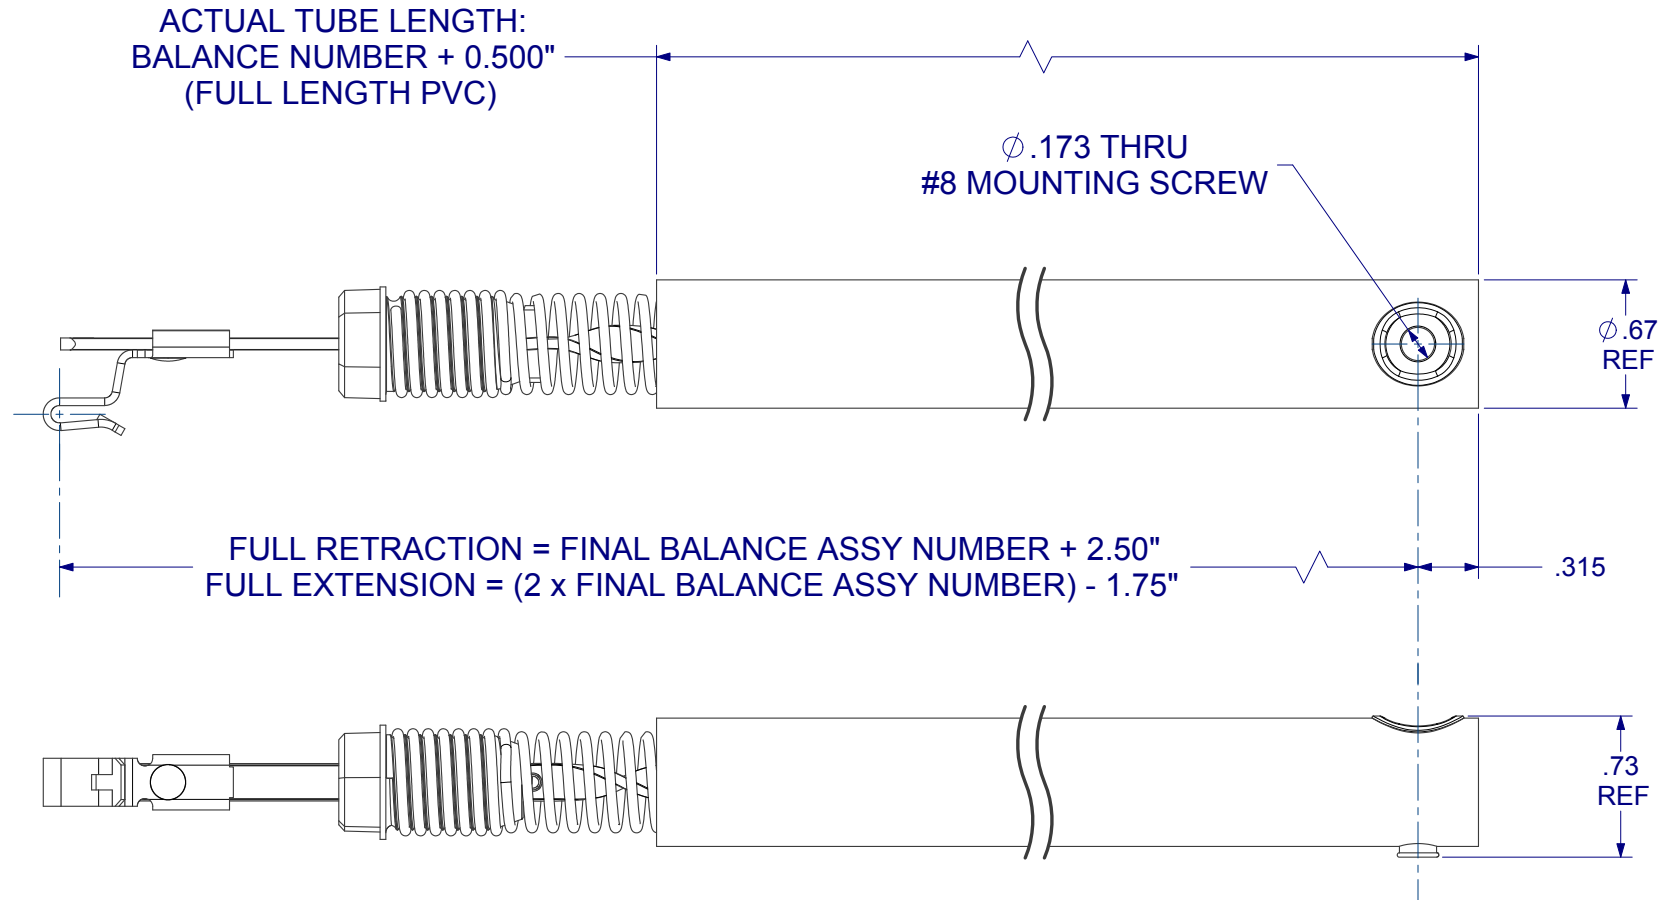

RECOMMENDED **APPLICATION RANGES**

THE VALUES SHOWN CONTAIN A DEGREE
OF BALANCE TRAVEL PROTECTION.
THEY ARE APPROPRIATE FOR USE IN
COMMERCIAL WINDOW APPLICATIONS.

MATERIAL/TREATMENT/FINISH:

NOTE: DO NOT SCALE DRAWING!

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE AS FOLLOWS:

INCHES		[MILLIMETERS]	
TWO DECIMAL PLACES	±.010	ONE DECIMAL PLACE	±.25
THREE DECIMAL PLACES	±.005	TWO DECIMAL PLACES	±.13
ANGULAR	± 1°	ANGULAR	± 1°
FRACTIONS	± 1/64		

DIMENSION IDENTIFICATION SYMBOLS

XXX = LOW / MEDIUM CRITICALITY

XXX^{CTF} = CRITICAL TO FUNCTION

XXX^{CTP} = CRITICAL TO PROCESS

XXX^{SPC} = STATISTICAL PROCESS CONTROL

LAST # USED = XX

THIS IS THE PROPERTY OF
CALDWELL MFG. CO.
ANY USE OR REPRODUCTION
WITHOUT AUTHORIZATION BY
THIS COMPANY IS PROHIBITED.


Solutions That Set New Standards
CALDWELL
Since 1888

Manufacturing Company 2605 Manitou Road, Rochester, New York

TITLE (ULTRA-LIFT)

UL CLIP-ON TRAVEL CHARACTERISTICS

THIRD ANGLE PROJECTION



DRAWN ASJ DATE 01/26/11

CHECKED DATE
APPROVED RML DATE 01/28/11

EX NO
A 99A127

DWG NO
SL14-091

SCALE 1:1

SHEET 1 OF 1

REV
0