


REVISIONS			
REV.#	DESCRIPTION	DATE	BY
1	16X137 now Obsolete. Changed all references of 16X137 to 16X37 in drawing and title block.	5/14/09	ASJ

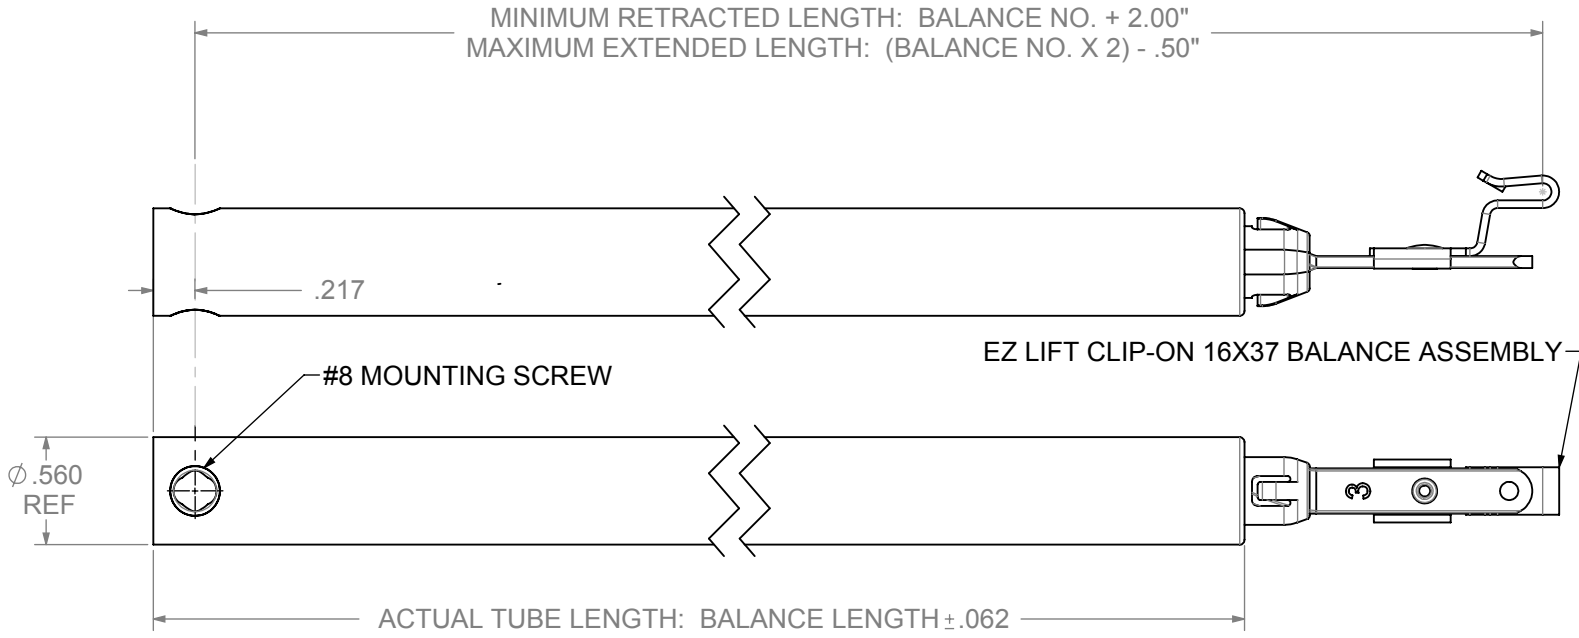

RECOMMENDED APPLICATION RANGES

THE VALUES SHOWN CONTAIN A DEGREE OF BALANCE TRAVEL PROTECTION. THEY ARE APPROPRIATE FOR USE IN COMMERCIAL WINDOW APPLICATIONS.

MATERIAL/TREATMENT/FINISH:			
<i>NOTE: DO NOT SCALE DRAWING!</i>			
UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE AS FOLLOWS:			
INCHES		[MILLIMETERS]	
TWO DECIMAL PLACES	± .010	ONE DECIMAL PLACE	± .25
THREE DECIMAL PLACES	± .005	TWO DECIMAL PLACES	± .13
ANGULAR	± 1°	ANGULAR	± 1°
FRACTIONS	± 1/64		

DIMENSION IDENTIFICATION SYMBOLS	
xxx	= LOW / MEDIUM CRITICALITY
xxx CTF	= CRITICAL TO FUNCTION
xxx CTP	= CRITICAL TO PROCESS
xxx SPC	= STATISTICAL PROCESS CONTROL
LAST # USED =	
THIS IS THE PROPERTY OF CALDWELL MFG. CO. ANY USE OR REPRODUCTION WITHOUT AUTHORIZATION BY THIS COMPANY IS PROHIBITED.	

CALDWELL MANUFACTURING COMPANY	
2605 MANITOU ROAD ROCHESTER, NEW YORK	
TITLE EZ-LIFT 5/8 EZ-LIFT CLIP-ON CLIP-ON 16X37 TRAVEL CHARACTERISTICS	
THIRD ANGLE PROJECTION	DRAWN RL DATE 2/15/07
	CHECKED DATE
	APPROVED RML DATE 05/14/09
A EX NO	DWG NO SL-40A-002 REV
SIZE	1
SCALE 1:1	SHEET 1 OF 1