


REVISIONS			
REV.#	DESCRIPTION	DATE	BY

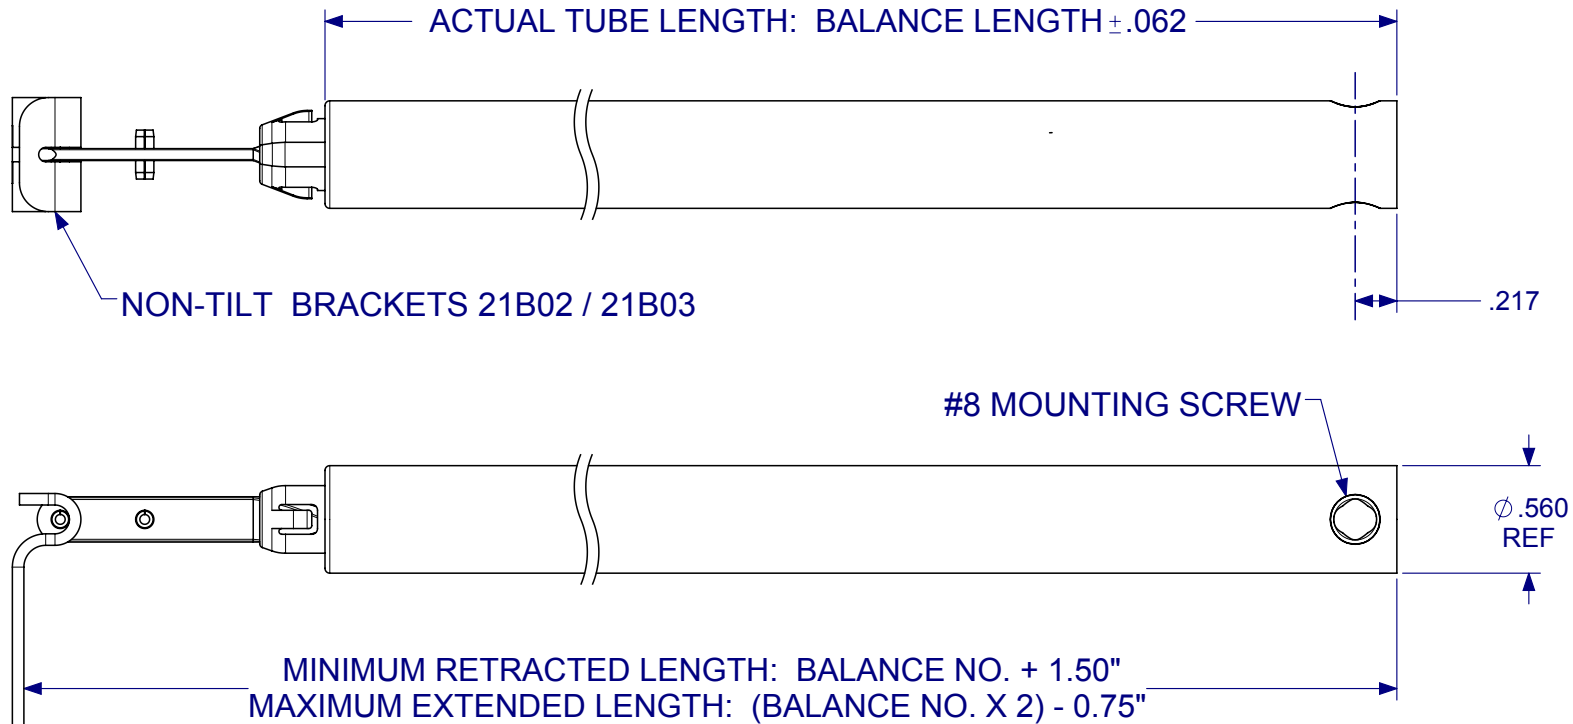

***RECOMMENDED
APPLICATION RANGES***

THE VALUES SHOWN CONTAIN A DEGREE OF BALANCE TRAVEL PROTECTION. THEY ARE APPROPRIATE FOR USE IN COMMERCIAL WINDOW APPLICATIONS.

MATERIAL/TREATMENT/FINISH:	
<i>NOTE: DO NOT SCALE DRAWING!</i>	
UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE AS FOLLOWS:	
INCHES	[MILLIMETERS]
TWO DECIMAL PLACES ± .010	ONE DECIMAL PLACE ± .25
THREE DECIMAL PLACES ± .005	TWO DECIMAL PLACES ± .13
ANGULAR ± 1°	ANGULAR ± 1°
FRACTIONS ± 1/64	

DIMENSION IDENTIFICATION SYMBOLS	
	= LOW / MEDIUM CRITICALITY
	= CRITICAL TO FUNCTION
	= CRITICAL TO PROCESS
	= STATISTICAL PROCESS CONTROL
LAST # USED = XX	

THIS IS THE PROPERTY OF
CALDWELL MFG. CO.
ANY USE OR REPRODUCTION
WITHOUT AUTHORIZATION BY
THIS COMPANY IS PROHIBITED.

Solutions That Set New Standards CALDWELL Since 1888				
Manufacturing Company 2605 Manitou Road, Rochester, New York				
TITLE (EZ-Lift, 5/8 Spirals) Balance Travel with 21B02,03 Non-Tilt Brkts				
THIRD ANGLE PROJECTION	DRAWN ASJ	DATE 05/01/13		
	CHECKED	DATE		
	APPROVED AMF	DATE 5/20/13		
A EX NO	DWG NO	SL40_009		REV
SIZE				0
SCALE 1:1		SHEET 1 OF 1		